



*Semi-automatic test of
inductively hardened
drive shafts
with eddyliner® P 16*



- for hardness,
- hardness depth and
- hardness runout

at up to 16 programmable positions

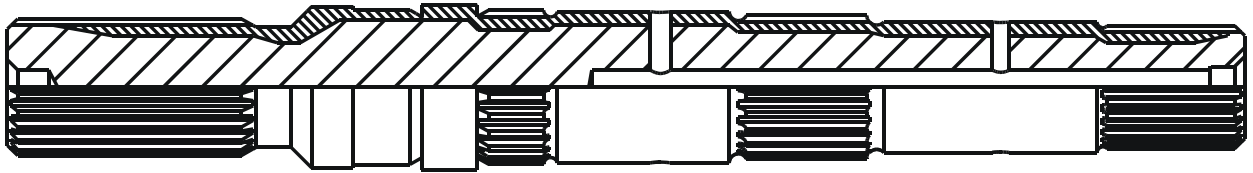

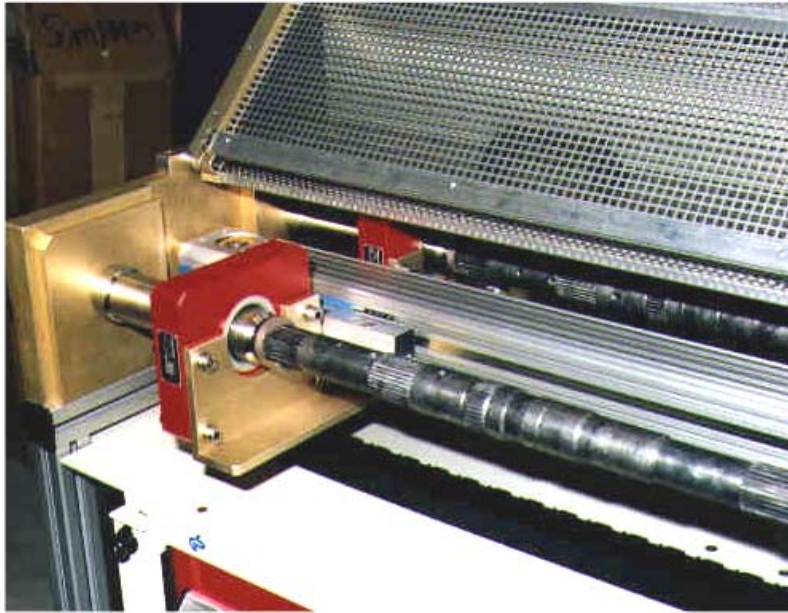

The test coil automatically moves to the 16 positions and tests each of them at 8 frequencies according to the PMFT (preventive multi-frequency testing) method

Easy change of the test parts by quick-clamping and parts receptacle of the parts. Change-over to a different part type can easily be done with the help of change parts, which are stored in a chest of drawers.

