


## Semi-Automatic System for Hardness Testing of **Camshafts**




Testing of camshafts for hardness, case depth and correct hardening zone at up to 16 test positions. At each test position, Preventive Multi Frequenz Test (PMFT) is carried out at 8 frequencies.

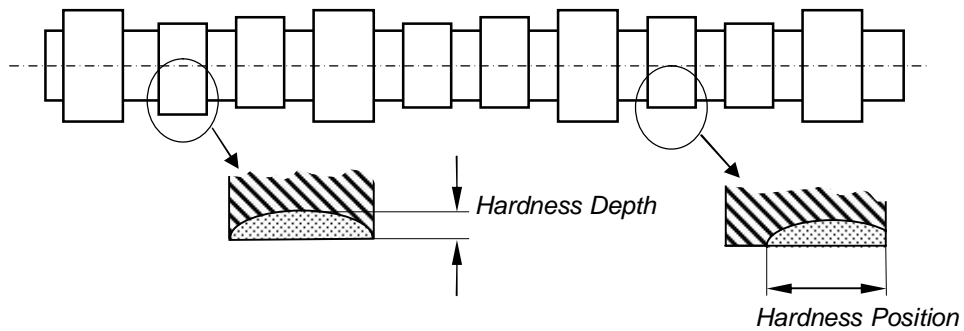


Software easily adjustable to new types of parts,  
storage of up to 20 types,  
Change-over in less than 10 minutes,  
Time required for test at 16 positions: max. 12 sec

Versatile use due to compact design and solid  
Wheels.

View of protective cover, **eddyliner®P 16**,  
operating panel and 16 O.K. indication lamps.

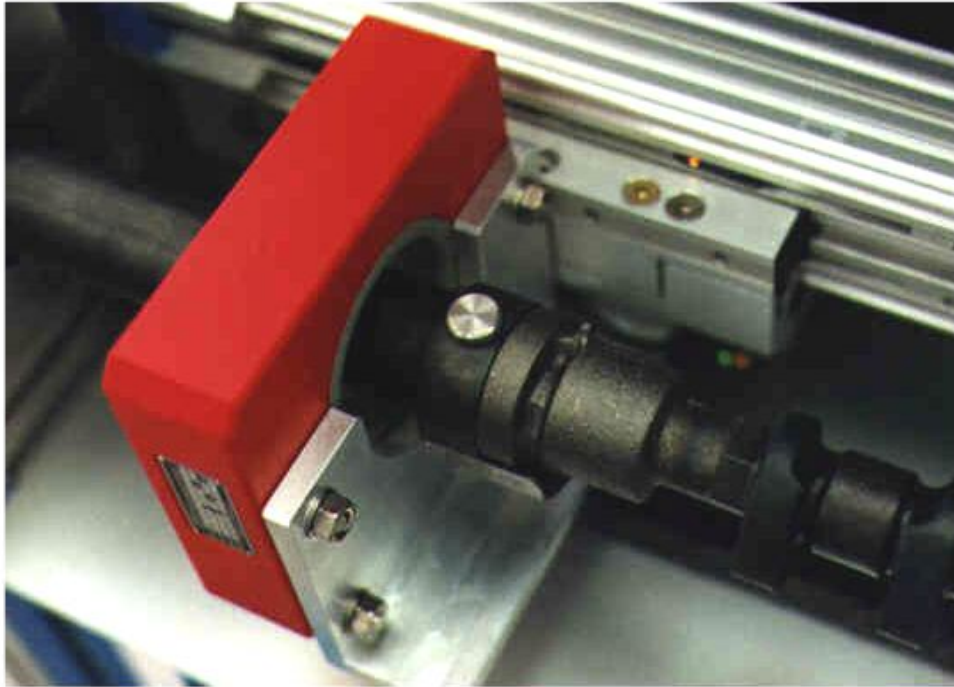

*The test coil automatically moves to up to 16 programmable test positions.*

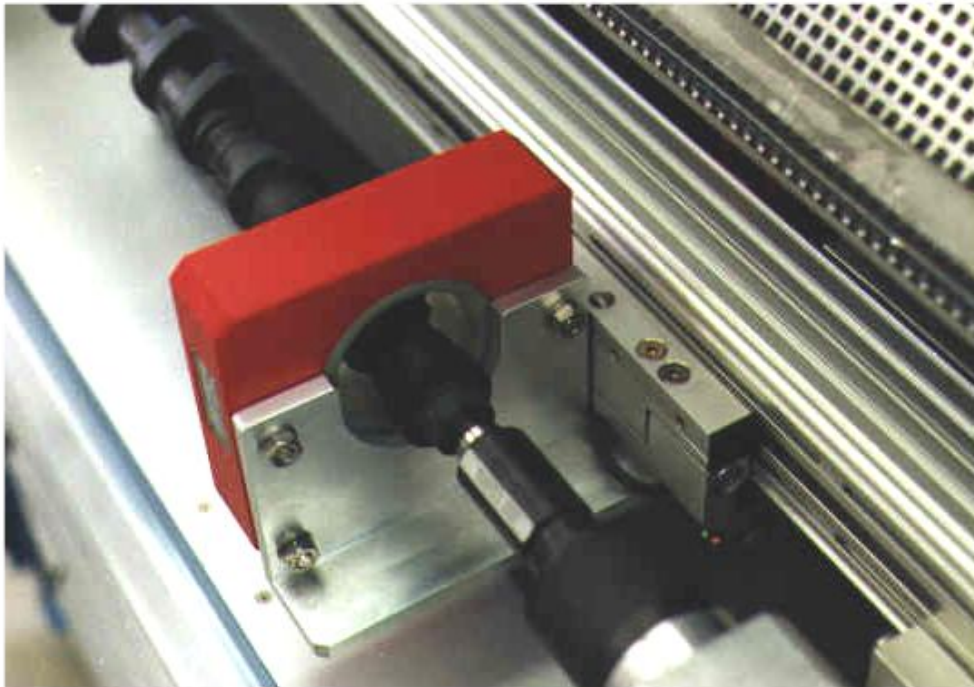



*Easy positioning of the test part by quick-clamping element  
(¼ rotation of the handle to loosen the spring-loaded top).*



*The integrated chest of roller-guided  
drawers offers sufficient space for  
exchange parts and master  
camshafts.*